




Save time when capturing, documenting, and sharing images with the Flexacam C3 microscope camera. It transforms your microscope into a stand-alone digital imaging station without the need for a PC. Make reliable and accurate decisions for your application tasks with powerful color accuracy. True-to-life colors and fine details are a given thanks to the 12 MP CMOS sensor, large dynamic range, and fast signal processing. Collaborate in real time and review images efficiently as a team by taking advantage of the fast display of live images.



Camera simplicity without a PC

- > Flexibly enhance documentation with intuitive measurement, annotation, overlay, and network tools
- View images directly on a monitor and record videos in full HD with up to 30 frames per second
- Save images to a local network or send as email attachment for easy sharing and storage



Powerful color accuracy


- Precise color reproduction is provided by the sensor's dynamic range and signal processing unit
- > Fine details of the sample are revealed thanks to the 12 MP CMOS sensor
- > Fast screening of sample with bright and dark areas due to the fast auto exposure



Collaboration in real time

- Clear and smooth visualization of sample movements on the screen thanks to the high frame rate of up to 60 fps and high signal transfer speed from sensor to monitor
- Viewing of live and captured images directly on a monitor simultaneously by multiple users when used in stand-alone or workstation mode



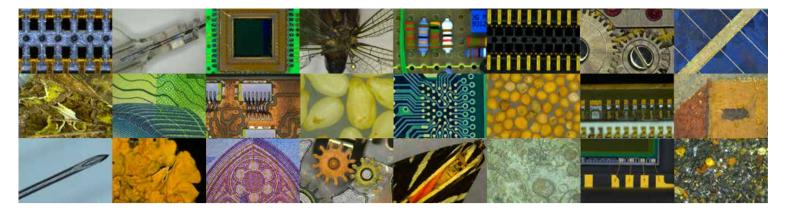

SPECIFICATIONS

Sensor type	CMOS
Sensor size	1/2.3"
Sensor format	H: 4,000; V: 3,000 (12 MP)
Pixel dimensions	$1.55 \ \mu m \times 1.55 \ \mu m$
Shutter mode	Rolling
Data interface	USB 3.1 type C
Additional connection options	HDMI 2.0a
	4 × USB 2.0
	Ethernet RJ45
	2.5 mm JACK connector for hand- / footswitch
Mechanical interface	C-mount
Exposure range	$100 \ \mu s - 120 \ ms$
Frames per seconds	4K / 60 fps in HDMI mode
Triggering	Footswitch
Sensor cooling	Passive
Gain	0–42 dB
Bit depth / Color depth	8 bit
Binning options	None
Optical filter	650 nm IR cut-off filter
Operating system	LAS X / stand-alone
Power consumption	< 15 W
Operating temperature	10 °C – 40 °C

CONNECT WITH US!



Leica Microsystems GmbH \cdot Ernst-Leitz-Straße 17–37 \cdot D-35578 Wetzlar T +49 (0) 6441 29-4000 \cdot F +49 (0) 6441 29-4155